

Plastic Access Panels




Key Features

- Quick and simple fitting
- Plastic access door
- Walls and ceilings
- Clip shut friction locking
- Low cost alternative
- 25mm picture frame

Plastic Access Panels provide a **low cost solution** for access to building services in **ceilings** and **walls**. Primarily used in domestic situations for access to **rodding eyes** and **stop cocks** the panels are **very simple to fit**. The narrow **17.5mm profile** produces a **lightweight solution** that can be used in **all types of wall or ceiling construction**. The panels are manufactured in the UK from **UV stabilized ABS** with a **lightly textured surface** that **will not discolour** and **can be over painted**. Using proprietary building adhesives or screws, the **hinged removable door** snaps in to place and has a **positive quality action**. Open with a screwdriver or coin in the visible slot opposite the hinge edge.

Use as a **repair panel** to cover a hole in the back of a kitchen cupboard for **access to a stop tap** or as a visible **designed detail** to a **rodding eye**. The panel finishes an access point **professionally and economically**,

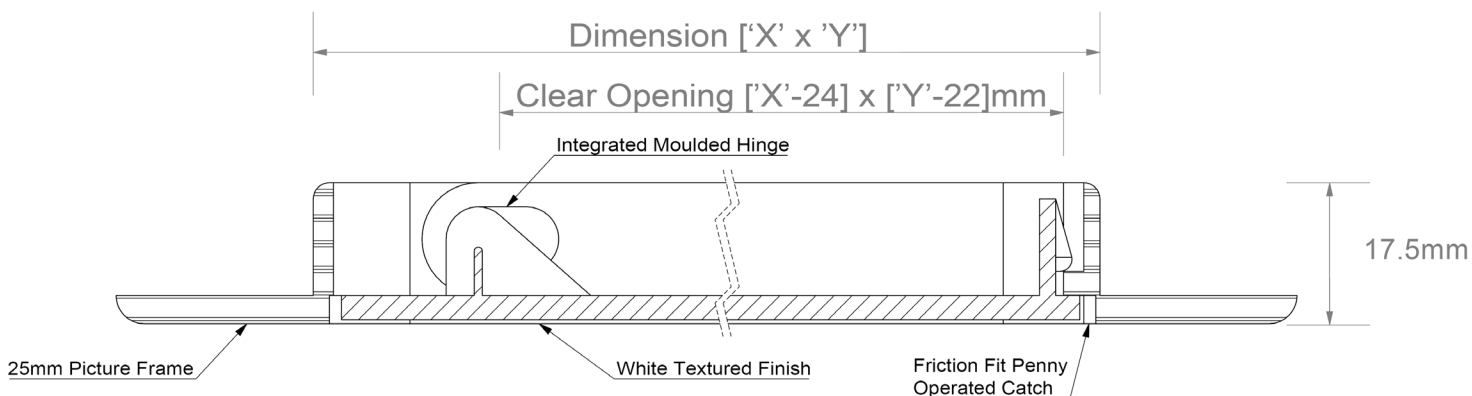

Contact us for a factory tour or to arrange an on site demonstration





Door Tray & Frame

Moulded from UV stabilised ABS plastic with a **25mm** wide **picture** frame to cover the cut edge of the aperture. Colour approximates to matt white **RAL 9010 20% Gloss**.

Hinge & Lock Mechanism

Moulded **clip shut friction lock** with integral pivot hinge locating into grooves in the frame.

Availability

Standard sizes (as below) available with **next day delivery** if ordered **before 2pm**.

Fitting

Prepare a **clear trimmed and protected opening** in the structure **5mm** larger than the ordered panel. Use proprietary silicone or 'No Nails' type adhesive to fix the panel in place. For ceiling applications it is recommended to drill through the internal frame section to achieve a mechanical fixing.

Online Support

See website for **fitting guides** and **videos**. **DXF, DWG, CAD, PDF, BIM cross-section drawings** and full technical specifications.

Operation & Maintenance

Use a coin or flat head screwdriver in the slot provided to prise open the door.

Avoid **abrasive cleaning materials**. Annually or more frequently if used very regularly check the operation.

Standard Sizes

160 x 110	150 x 150	230 x 110
200 x 200	300 x 300	

Contact us for a factory tour or to arrange an on site demonstration

sales@simplis.co.uk

01724 853 090

simplis.co.uk

