

Value Range Plasterboard Door

(Touch Catch)




Key Features

- Plasterboard faced access door
- Unique hinge design
- Draught reducing brushes between door and frame
- Simulated Beaded frame for skim coat or tape and jointing
- Concealed Touch Catch
- Minimalist style

The **Value Range Plasterboard Access Panel** offers a **budget-friendly** way to create **clean, simple** access points in plasterboard **walls** or **ceilings**, especially where space is limited. These panels are **lightweight** yet **durable**, and they work well with all types of plasterboard construction. The front of the door can be skimmed or tape and jointed, allowing it to blend in with the surrounding surface for a **clean, minimalist** look. The panel opens using two **spring-loaded** latches that release with a **simple press** on one side.

It comes with a **beaded frame** and a **perforated edge** that helps it bond securely with fresh plaster or jointing compound. Around the edge of the door, **draught-reducing** brushes help **seal** the gap when closed, cutting down on **air leakage**. Even though it's a budget option, it's packed with practical features and built to a high standard. We believe it's one of the best plasterboard-faced panels available for creating low-cost, effective access points.

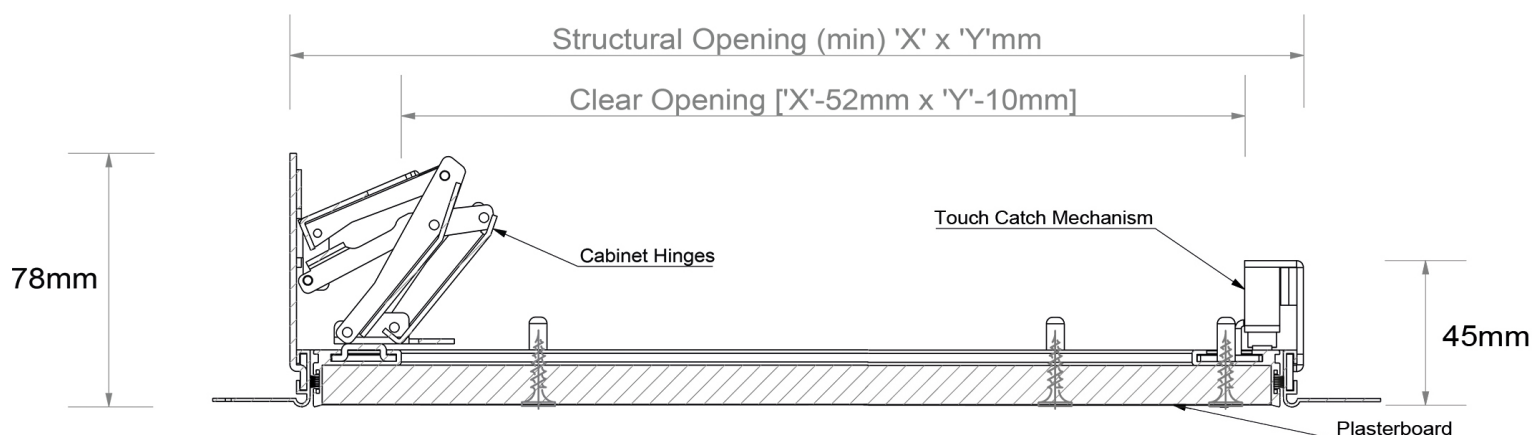

Contact us for a factory tour or to arrange an on site demonstration

sales@simplis.co.uk

01724 853 090

simplis.co.uk





Door Tray & Frame

Formed from **1.0mm** aluminium with a **25mm** wide perforated frame finished in **polyester powder coat white (RAL 9010 20% Gloss)**.

Hinge & Lock Mechanism

Factory fitted pin hinge. Push catch operated lock.

Availability

Standard sizes (as below) available with **next day delivery** if ordered **before 2pm**. Bespoke **access panels** available on request. Please call or email a member of our **Technical Sales Team** for current lead times and more information.

Fitting

Prepare a **clear trimmed and protected opening** in the structure **5mm** larger than the ordered panel. Contact us for details.

Screw fix using suitable screws through the **pre-punched holes** to all four sides of the frame, use all fixing holes provided and the frame flange fixing holes. Finish the **beaded frame** in the same way as any plaster stop bead. Make the plaster finish on the door face as neat as possible. Complete operation with door in frame where possible.

Online Support

See website for **fitting guides** and **videos**. **DXF, DWG, CAD, PDF, BIM cross-section drawings** and full technical specifications.

Operation & Maintenance

Simply push the door face to operate the Touch Catch lock system. Avoid **abrasive cleaning materials**. Check the operation annually, especially the hinge points and lock, or more frequently if used very regularly. Tighten or oil as required.

Standard Sizes

300 x 300

450 x 450

600 x 600

Contact us for a factory tour or to arrange an on site demonstration

sales@simplis.co.uk

01724 853 090

simplis.co.uk

